
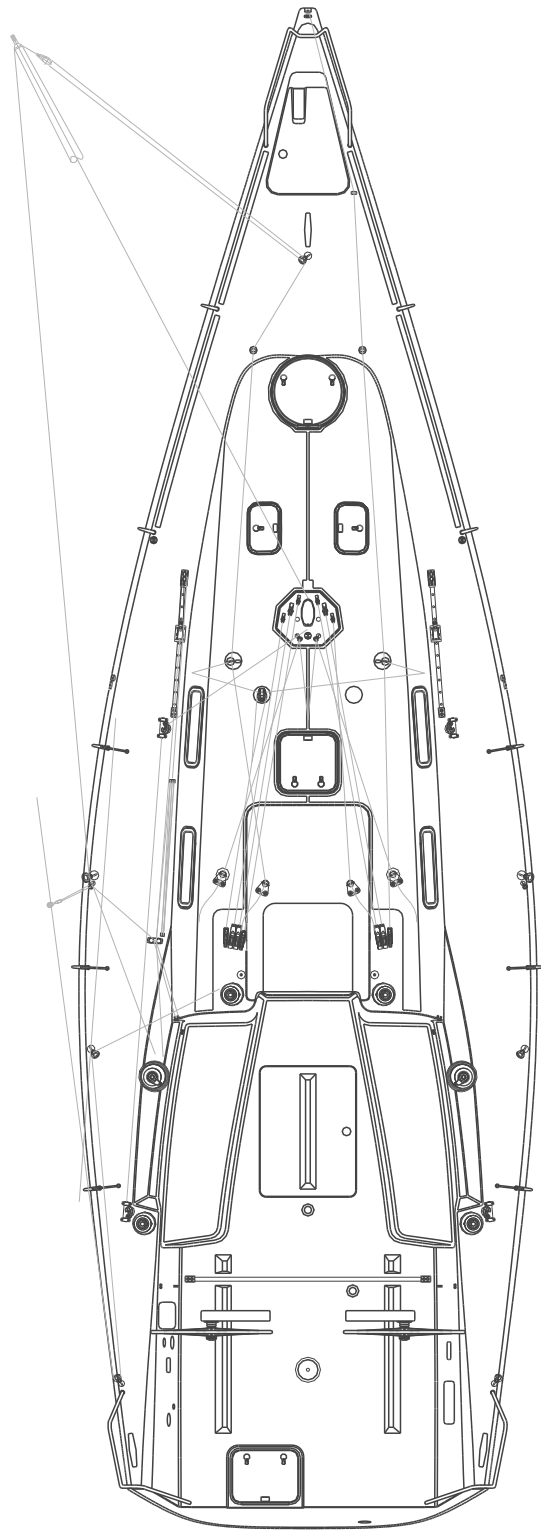


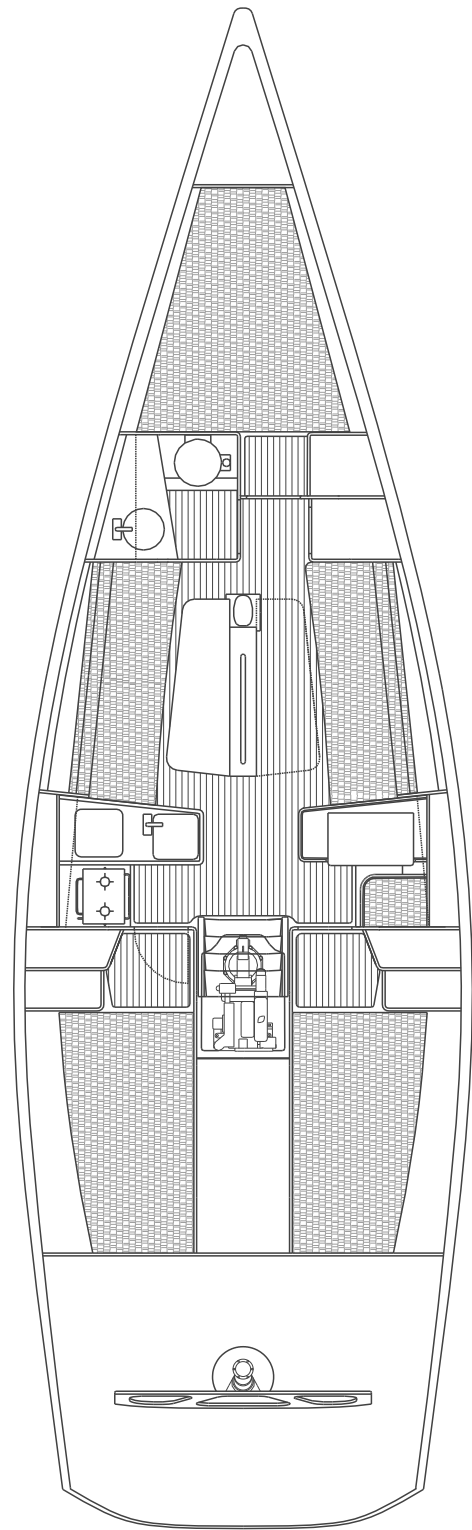

M.A.T.
12

Design	Mills Design
LOA	12.45 m
LWP	10.80 m
Beam	3.75 m
Disp	7.140 kg
Disp IRC	7.912 kg
DLR	175
Draft	2.55 m

BO	0.24 m
x	0.07 m
h	0.04 m
SO	1.41 m
y	0.23 m
oh%	13.25
slope	0.16

I	16.98 m
P	16.56 m
E	5.87 m
J	4.80 m
FL	17.65 m

MHW	3.80 m
%	0.647
MTW	2.26 m
%	0.385
MUW	1.29 m
%	0.220
MSA	59.69 m2
LL	16.90 m
LP	5.10 m
LP%	106
HHW	2.58 m
HHW %	0.506
HHB	0.14 m
HSA	43.77 m2
HSA %	0.42

SPA	148 m2
base SPA	155 m2
SPA % Base	0.95
STL	5.50 m
base STL	5.55 m
STL % base	0.99
Non Spin TCC	1.111
TCC	1.136

Disp/LWL	158
SA/Disp Up	27.99
SA/Disp Down	56.19

Engine power	30/40 Hp
Fuel capacity	137 L
Water capacity	200 L
CE certification	A10

